

CIVIC EC DBE2 300 S21

The CIVIC EC DB units are designed for single-room ventilation of schools, offices and other public and commercial premises

- Power of electrical preheater: 1050
- Power of electrical reheater: 1400
- Sound pressure level LpA at 1 m: 33
- Heat exchanger type: Counter flow
- Heat exchanger material: Polystyrene
- Bypass: Auto
- Reheater: Electric
- Preheater: Electric
- BMS protocol: ModBus
- Control: Smartphone, Wired control panel, Wireless control panel
- Casing material: Coated steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- PM2.5 sensor: Optional
- Temperature sensor: Built-in

	Unit of measurement	CIVIC EC DBE2 300 S21
Phases	-	1
Maximum supply voltage	V	230
Minimum supply voltage	V	230
Power supply frequency	Hz	50/60
Power of electrical preheater	W	1050
Power of electrical reheater	W	1400
Maximum airflow	m³/h	300
Sound pressure level LpA at 1 m	dB(A)	33
Heat recovery efficiency, max	%	88
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	80
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IP20
Ingress protection rating of the drive	-	IP44
Ambient air humidity max	%	60

Minimum wall thickness	mm	100
Maximum wall thickness	mm	2000

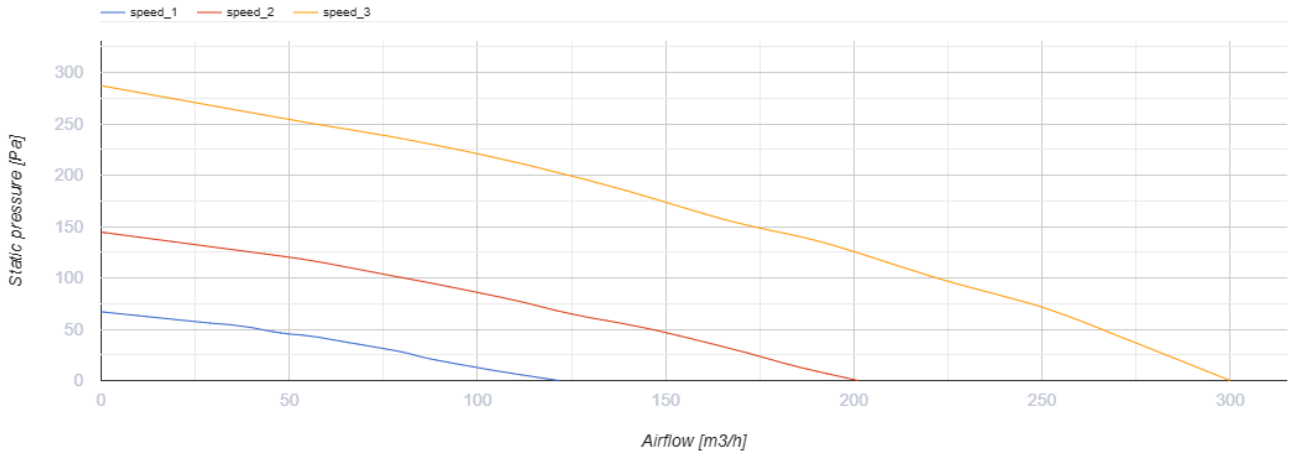

Dimensions

Ø D	H	H1	H2	H3	L	L1	W	W1	W2
199	333	347	145	188	818	873	1547	1155	196

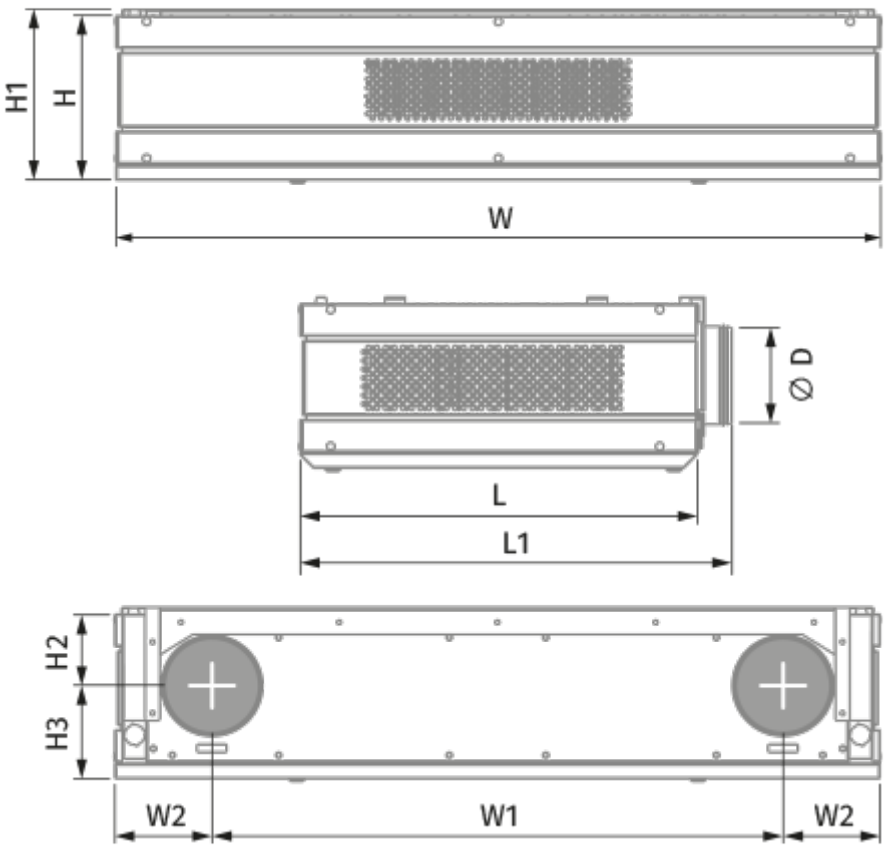

Accessories

Condensation drainage

Name	Photo	Description
SFK 20x32		Hydraulic syphon for condensate drainage
CP-2		Drain pump

Control Panels

Name	Photo	Description
S25		LCD control panel
S22		Control panels
S22 Wi-Fi		Control panels

CO2 sensors

Name	Photo	Description
CD-1		CO2 sensors
CD-2		CO2 sensors

Humidity sensors

Name	Photo	Description
FS2		Humidity sensor

Other accessories

Name	Photo	Description

FP 270x216x48 F8		F8 filter
FP 518x270x48 F8 C		F8 carbon filter
FP 270x216x48 G4		G4 panel filter
FP 518x270x48 H11		H11 HEPA filter

Metal

Name	Photo	Description